

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau




(43) International Publication Date  
7 June 2001 (07.06.2001)

PCT

(10) International Publication Number  
**WO 01/40694 A2**

- (51) International Patent Classification<sup>7</sup>: **F16L**
- (21) International Application Number: **PCT/GB00/04535**
- (22) International Filing Date:  
28 November 2000 (28.11.2000)
- (25) Filing Language: **English**
- (26) Publication Language: **English**
- (30) Priority Data:  
SV99A000038 1 December 1999 (01.12.1999) **IT**
- (71) Applicant (for all designated States except US): **TI GROUP AUTOMOTIVE SYSTEMS LIMITED** [GB/GB]; Lambourn Court, Abingdon, Oxfordshire OX14 1UH (GB).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **BALBI, Paolo** [IT/IT]; Via S Erasmo, 10/1, I-16030 Sori (IT). **PICCO, Pierluigi** [IT/IT]; Piazzale Olimpia, 36/15, I-16036 Recco (IT).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- Published:  
— Without international search report and to be republished upon receipt of that report.
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **PRESSURIZED FLUID PIPE**

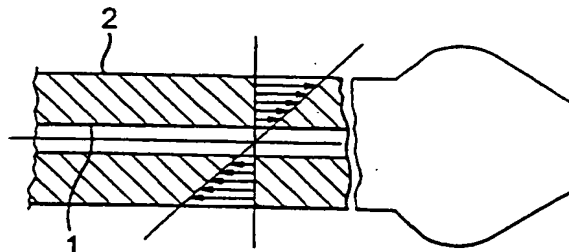

(57) Abstract: A pipe for pressurised-fluid feed systems, such as a diesel engine fuel pipe, has a wall of predetermined thickness with an internal surface and an external surface and an internal bore with a predetermined diameter for through-flow of the fluid. The internal surface and/or external surface are subjected to a nitriding or carbonitriding treatment, so as to obtain an increase in the hardness and/or the mechanical strength of the pipe, with regard to both stresses due to the pressure of the fluid and axial stresses due to flexing of the pipe.

**WO 01/40694 A2**